




Customer Support 1-866-963-0294
customerservice@easywoodtools.com

Product Information
1/8" Easy Parting Tool™
ITEM# PT150

THE 1/8" EASY PARTING TOOL™

The 1/8" Easy Parting Tool™ is great for making that last part-off cut on projects up to 5" diameter and establishing diameters on your spindle turning projects. Also, use your imagination to easily add tiny details, deep grooves to your project and many more unique cuts.

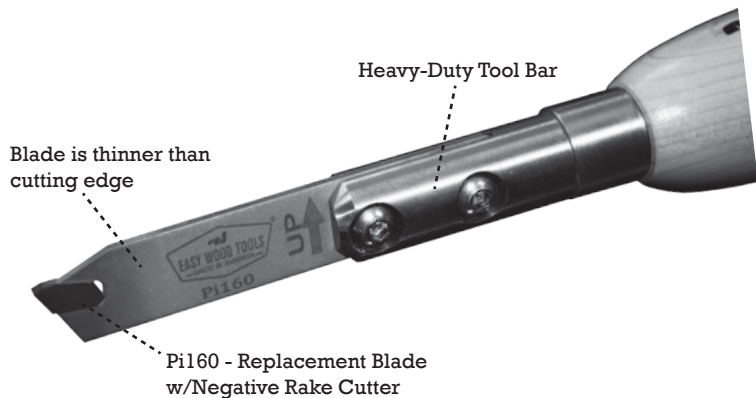


This is the easiest and best performing parting tool ever! Perfect geometries are built right into the replaceable cutter blade. The negative rake carbide blade is replaceable when this becomes necessary.

JOIN OUR MAILING LIST

To receive the latest news from Easy Wood Tools:

- Product updates
- Demonstration events and classes
- New tool models and products

Sign-up at www.easywoodtools.com

 And don't forget to check us out on Facebook!

WARRANTY INFO

Easy Wood Tools products are legendary in their ability to withstand an incredible amount of use in the hands of most any turner. The Easy Parting Tool underwent countless hours of real world testing for strength and durability both in-house and in the hands of pro turners all over the country. This does not mean the product is indestructible, but if used within reason, it will last you a lifetime.

Failure to follow the product use guidelines set forth in this information sheet will void your warranty. Easy Wood Tools will not issue a refund or replacement if you damage your tool through improper use.

We want you to be happy with your investment in our products. If you have any issue at all with any Easy Wood Tools product, we want to hear from you. Thank you for purchasing this Easy Parting Tool™!

The Easy Wood Tools Team



FOR YOUR SAFETY

- Read this product information and watch our online videos carefully until you fully understand the concepts involved
- Read and understand your lathe's owners manual
- Wear safe clothing and proper eye protection
- Secure your workpiece properly
- Use the right tool for the job
- Set the tool rest height to align the top of the cutter to spindle center
- Always maintain your tool flat on the tool rest and parallel to the floor
- Never use the tool with the handle below level
- Maintain a sharp cutter so that you get a clean cut without forcing the tool into the wood
- Never cut deeper than the length of the fully exposed tool blade or the tool may become unstable

TOOL TIPS

- Maintain the tool flat on the tool rest for the duration of the cut. If you tilt it any, the tool may bind in the groove and cause tool damage or injury.
- Before advancing your tool into the project ensure that the arrow on the side of the cutter blade is pointing up
- Do not make cuts on the face of your project more than 1/8" deep without widening the groove with a separate plunge cut
- Never wiggle the tool side to side to widen the cut Don't force the tool into the cut but rather use slow, even cutting pressure
- Never part your project completely in two when working between centers. This would cause the two halves of the wood to pinch and pull out the cutter. (Cut down to about a 1/4" diameter and then handsaw the remainder)

1/8" Easy Parting Tool™



W Installing the Negative Rake Replacement Blade

Replacing the Negative Rake Replacement Blade is easy with the supplied 5/32" hex wrench. Simply attach with the two stainless steel 1/4-20 X 5/8" button-head cap screws and snug down, there is no need to over-tighten. Be sure the blade arrow is pointing up toward logo on the handle. Before every use, check to be sure screws are tightened.

